


Current Transformer Cabinets

KCPL Area Units | UL Listed

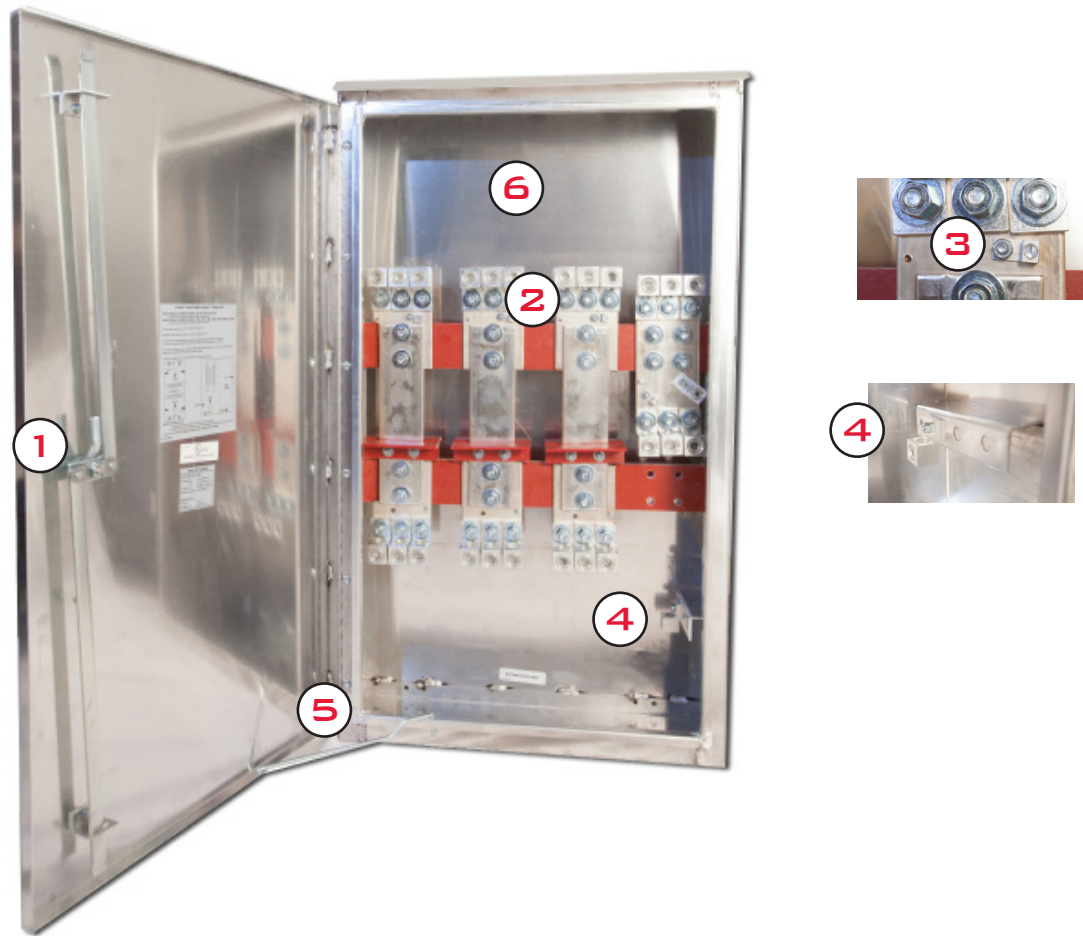

HIGHLIGHTS AND FEATURES

- 1 Three-Point Latching Handle & Locking Mechanism:** Padlocking handle with three-point latching system allows for easy locking and securing of the unit.
- 2 Lugs:** tin plated aluminum, suitable for aluminum or copper conductors and rated for 90°. Lugs are sized for #4-600 MCM.
- 3 Potential Tap:** Included on buss
- 4 Grounding Lug:** Single position, 350 kcmil.
- 5 Wind-stop latch**
- 6 Aluminum shell**

UL Listed

NEMA 3R rated for indoor or outdoor applications

Aluminum piano hinged door(s)

Wall mount brackets provided

CT supports included

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.



Current Transformer Cabinets

KCPL Area Units | UL Listed

Current Transformer Cabinets | Overhead Service Entry

Catalog Number	Amps	Voltage	Service	Phase	Fault Current Rating	# of Lugs		Dimensions			Hinged Doors
						Line	Load	H"	W"	D"	
KCPLM-813	800	600	OH	1Ø3W	65,000 amp	3	3	42	24	8½	Single
KCPLM-834	800	600	OH	3Ø4W	65,000 amp	3	3	42	24	8½	Single
KCPLM-1234	1200	600	OH	3Ø4W	85,000 amp	4	4	48	36	14 ¹¹ / ₁₆	Single
KCPLM-1634	1600	600	OH	3Ø4W	85,000 amp	5	5	60	38	16 ¹¹ / ₁₆	Single
KCPLM-2034	2000	600	OH	3Ø4W	85,000 amp	6	6	66	42	14 ¹¹ / ₁₆	Double
KCPLM-3034	3000	600	OH	3Ø4W	85,000 amp	8	8	72	42	20 ¹¹ / ₁₆	Double

Current Transformer Cabinets | Underground Service Entry | Underground Exit

Catalog Number	Amps	Voltage	Service	Phase	Fault Current Rating	# of Lugs		Dimensions			Hinged Doors
						Line	Load	H"	W"	D"	
KCPLM-813UGBX	800	600	UG	1Ø3W	65,000 amp	3	3	48	36	14 ¹¹ / ₁₆	Single
KCPLM-834UGBX	800	600	UG	3Ø4W	65,000 amp	3	3	48	36	14 ¹¹ / ₁₆	Single
KCPLM-1234UGBX	1200	600	UG	3Ø4W	85,000 amp	4	4	54	45¾	14 ¹¹ / ₁₆	Single
KCPLM-1634UGBX	1600	600	UG	3Ø4W	85,000 amp	5	5	66	54	14 ¹¹ / ₁₆	Single
KCPLM-2034UGBX	2000	600	UG	3Ø4W	85,000 amp	6	6	66	54	14 ¹¹ / ₁₆	Double
KCPLM-3034UGBX	3000	600	UG	3Ø4W	85,000 amp	8	8	72	50	20 ¹¹ / ₁₆	Double

Current Transformer Cabinets | Pad Mounted

Catalog Number	Amps	Voltage	Service	Phase	Fault Current Rating	# of Lugs		Dimensions			Hinged Doors
						Line	Load	H"	W"	D"	
KCPLM-813PM	800	600	UG	1Ø3W	65,000 amp	3	3	58	36	14 ¹¹ / ₁₆	Single
KCPLM-834PM	800	600	UG	3Ø4W	65,000 amp	3	3	58	36	14 ¹¹ / ₁₆	Single
KCPLM-1234PM	1200	600	UG	3Ø4W	85,000 amp	4	4	54	45¾	14 ¹¹ / ₁₆	Single
KCPLM-1634PM	1600	600	UG	3Ø4W	85,000 amp	5	5	66	54	14 ¹¹ / ₁₆	Single
KCPLM-2034PM	2000	600	UG	3Ø4W	85,000 amp	6	6	66	54	14 ¹¹ / ₁₆	Double
KCPLM-3034PM	3000	600	UG	3Ø4W	85,000 amp	8	8	72	50	20 ¹¹ / ₁₆	Double

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

