


# Single Position Lever Bypass

320 Amp Continuous | 5 Terminal | Ringless | 600 VAC



U5864-X-HSP

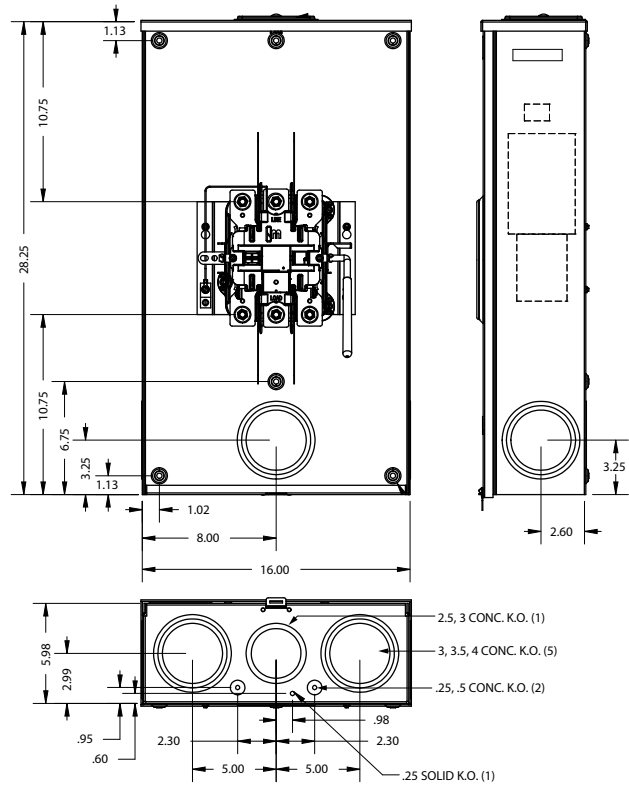

## Features & Details

- Replaces the U3313-X-HSP and UAP3313-X-HSP
- 320 amp continuous, 400 amp max rated
- Heavy duty lever bypass – jaw clamping
- Milbank reliability
- Available in painted galvanized steel or painted aluminum shell

## 320 Amp – 5 Terminal – Single Position – Lever Bypass – Ringless – 1Ø3W

Catalog Number	Service	Material	Bypass	Connectors CU/AL		Dimensions		
				Line	Load	D"	W"	H"
U5864-X-HSP	OH/UG	Painted Galvanized Steel	Lever	3/8" x 16 Studs	3/8" x 16 Studs	6	16	28¼
UAP5864-X-HSP	OH/UG	Painted Aluminum	Lever	3/8" x 16 Studs	3/8" x 16 Studs	6	16	28¼

## Notes

- **Lug Kits:** Compatible lug kit for these these units is the **K1540L** (single barrel (2) 250 kcmil or (1) 600 kcmil). Three connectors per kit.
- **Bypass:** Lever provides clamping action on meter spades and also operates bypass device.

