


Milbank Meter Sockets

U5865 | Temporary Power Solution



U5865-XL-38GBGRW

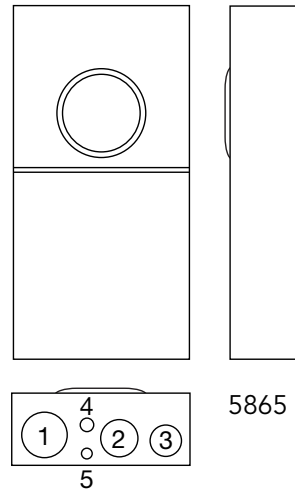

5865

5-20GR single pole 20A breaker	6-20R GFI 20A 2-pole breaker	5-20GR single pole 20A breaker

Specifications

- Designed for temporary power needs
- UL listed
- 100 amp continuous rating
- 4 terminal, 1Ø
- Ring type meter front
- Short circuit withstand rating 10K AIC
- Provisions for up to three factory installed receptacles
- Type 3R construction for durable outdoor use, lockable and sealable front covers
- Milbank grey polyester powder coat finish
- Wire terminals accept copper or aluminum conductors
- Line & Neutral: #6 – 250 kcmil
- Six-circuit plated copper interior accepts standard plug-in type circuit breakers up to a total of 100 amps maximum. Acceptable manufacturers: Siemens, Square-D, Cutler-Hammer or GE

100 Amps | 4 Terminals | Temporary Power | Ring Type

Catalog Number	Service	Hub	Connectors CU/AL		Dimensions			Knockouts				
			Line	Load	D"	W"	H"	1	2	3	4	5
U5865-XL-38GBGRW	OH/UG	C.P.	#6-250	CB	5½	14	28¼	3	2½	2	½, ¾	¼, ½

Additional receptacle configurations available, consult factory.

Plug-In Breaker Compatibility Chart

Amps	Cutler Hammer	Siemens	General Electric	Square D
0-100	QP, BD, BR	QP, QT	TQ, THQ, THQL	Homeline (non-GFI)

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements before ordering or installing equipment.

